


NOTES:

1. MATERIAL
 HOUSING: PBT, GLASS FILLED, UL RATED 94V-0, BLACK.
 FRONT SHELL: CARBON STEEL.
 BOARDLOCKS AND INSERTS: BRASS
 CONTACTS: PHOSPHOR BRONZE
 2. FINISH
 FRONT SHELL: TIN PLATED.
 CONTACTS: GOLD FLASH OVER 2.54 | m [.000100] MIN NICKEL ON ENTIRE CONTACT AREA.
 BOARDLOCKS AND INSERTS: NICKEL PLATED.
 3. ELECTRICAL SPECIFICATIONS:
 20-38 OHMS AT 30 MHz, TYP.
 24-43 OHMS AT 50 MHz, TYP.
 29-48 OHMS AT 100 MHz, TYP.
- ⚠ SCI, 56-414-001-HD AND DATE CODE MARKED ON THIS SURFACE.

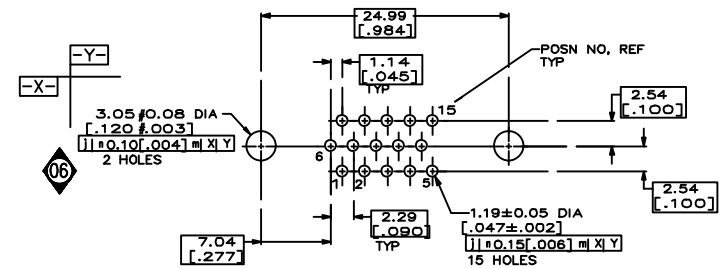

P.C. BOARD MOUNTING DIMENSIONS

6	REVISED PER 38554-ENG	16 AUG 07	JK	DH	DESIGNED BY	D. GELTZ	21 MAY 07	REVISION	-	REV. HEAT	-
5	REVISED PER 34918-QPD	21 MAY 07	JK	DH	DESIGNED BY	D. HENRY	21 MAY 07	REVISION	-	REV. HEAT	-
4	REVISED PER 90146	29 FEB 00	KH	CL	DESIGNED BY	D. HENRY	21 MAY 07	REVISION	-	REV. HEAT	-
RECEPTACLE ASSEMBLY, 15 POSITION, RIGHT ANGLE, HIGH DENSITY, FERRITE 4:1 A156-414-001-HD 1											

